


iLoq C00S.2 KEY-TUBE LOCK

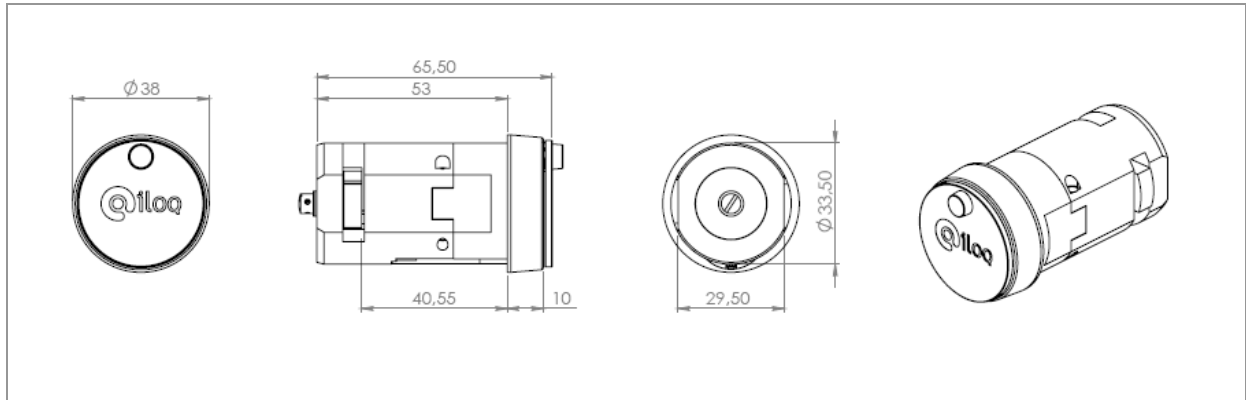

Features

The patented, award winning iLoq S10 locking system offers advanced security and convenient access management for master-key locking environments.

The iLoq C00S.2 key tube lock enables usage of the iLoq S10 locking system in key tube applications. Key tube applications are designed for environments where a third part organization, like fire service or a telecommunication company, needs to have access to the premises/buildings using their own key. The key to the premises is placed in wall mounted key tubes, which the organizations can open using their own key.

The self-powered iLoq key-tube operates in harsh environments. It records audit trail of the key usages and enables flexible access management for each key and each key-tube. The security level is kept high and security gaps caused by lost key can be eliminated completely without costly change of locks and keys. The key-tube locks fit into standard 40 mm key-tubes.

iLoq C00S.2 key-tube lock in brief

- Programmable electromechanic key-tube lock
- Self-powered: no batteries or external energy source required for the lock and key, and no need for cabling
- All iLoq C00S key-tube locks and iLoq K10S keys are mechanically alike
- Fits into standard 40 mm key-tubes, and therefore easy to install
- Dust and rain protected keyway
- Secured using powerful encryption methods; unique 64bit challenge and SHA-1 computed 160bit MAC pair for key authentication
- Programmed using a mobile phone or computer and iLoq P10S Programming device
- Blacklist for individual lost keys
- Access group list for key accesses
- Combined blacklist and access group capacity 128 entries
- Audit trail capacity 768-832 events with time stamp
- Clock circuit's battery lifetime 10 years, commutable

Technical Data

The C00S.2 key-tube lock consists of slightly modified iLoq C10S.2 lock cylinder which is inserted into the key-tube lock case.

Technical data of iLoq C10S.2

prEN 15684:2007 (see Note 1) Ten digit coding classification

	Grade, Requirements	Notes
1. Category in use (Grades 0..2)	Grade 2	See Note 2
2. Durability EN 1303:2005 (Grades 4..6)	Grade 6, >200 000 openings	
3. Door mass (Not applicable)	NA	
4. Fire resistance EN 1303:2005 (Grades 0..1)	Grade 0	
5. Safety (Not applicable)	NA	
6. Environmental resistance (Grades 0..3)	Grade 2, -10°C..+55°C, IP21	tested to -40°C..+70°C
7. Mechanical code variations (Grades A..F)	Grade A, 0	Not individual cut
8. Electronic code variations (Grades A..F)	Grade F, 1000 000 000	64bits, unique challenge
9. System management (Grades A..I)	Grade B, 100 records without time recording	Actual 832 records without time recording
10. Attack Resistance EN 1303:2005 (Grades 0..2)	Grade 2	See Note 3

Note 1), Requirements of iLoq C10S.1 Lock Cylinder and iLoq K10S.1 Key is defined according to prEN 15684:2007 Building hardware – Mechatronic cylinders – Requirements and test methods. prEN 15684:2007 draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 33.

Note 2), Grade 2 include requirements and tests against bumps, hits, vibrations, high voltage, electrostatic discharge, electromagnetic field and magnetic field attacks.

Note 3), The hardened steel key-tube case gives 15kN pull resistance and protects the cylinder against drilling and hammering according to Grade 2 if the key-tube is properly installed into the construction.

Operation

To operate the lock, insert the key entirely into the keyway and turn the key. If the lock does not open, remove the key and re-insert it into the lock, this time more slowly.

Always insert the key into the keyway gently and slowly. The electric energy is harvested for lock operations when the key is inserted into the lock. If the movement is too fast the lock is kept in the locked state. Do not use force or bend the key when inserting it into the lock.

The contact wire on the metal part of the key must be clean and smooth. If the contact wire is dirty, wipe it clean using a soft tissue. Replace the key if the contact wire is damaged.